



## Sine Amplitude Converter™ (SACTM)

### Features & Benefits

- 40V<sub>DC</sub> to 1V<sub>DC</sub> 130A current multiplier
  - Operating from standard 48V or 24V PRM™ regulators
  - Up to 60 Volts DC input
  - K of 1/40 provides up to 130A DC output current
  - Up to 1600x reduction in output capacitance requirements
- High efficiency (>94%) reduces system power consumption
- High density (1354A/in<sup>3</sup>)
- Vicor's 1323 ChiP package enables low impedance interconnect to system board
- Provides enable / disable control, internal temperature monitoring, internal current monitoring
- ZVS / ZCS resonant Sine Amplitude Converter topology
- Can be used in parallel for high current applications

### Typical Applications

- CPU, GPU & ASIC Core Rails
- Computing and Telecom Systems
- Automated Test Equipment
- Communications Systems

### Product Ratings

$V_{IN} = 0 \text{ to } 60\text{V}$	$I_{OUT} = 130\text{A (nom)}$
$V_{OUT} = 0 \text{ to } 1.5\text{V (no load)}$	$K = 1/40$


### Product Description

Vicor's ChiP VTM current multiplier is a high efficiency Sine Amplitude Converter (SAC) designed to deliver low voltage output. The Sine Amplitude Converter offers a low AC impedance beyond the bandwidth of most downstream regulators; therefore capacitance normally at the load can be located at the input to the Sine Amplitude Converter. Capacitance at the input of the VTM is reflected to the output by a factor of  $(1/k)^2$ , resulting in savings of board area, materials and total system cost.

Vicor's ChiP packages are compatible with standard pick-and-place assembly processes. The co-molded ChiP package provides enhanced thermal management due to a large thermal interface area and superior thermal conductivity. The high conversion efficiency of the VTM increases overall system efficiency and lowers operating costs compared to conventional approaches.

When powered by a PRM, the VTM enables the utilization of Factorized Power Architecture, which provides efficiency and size benefits by lowering conversion and distribution losses and promoting high density point of load conversion.

## Pin Configuration

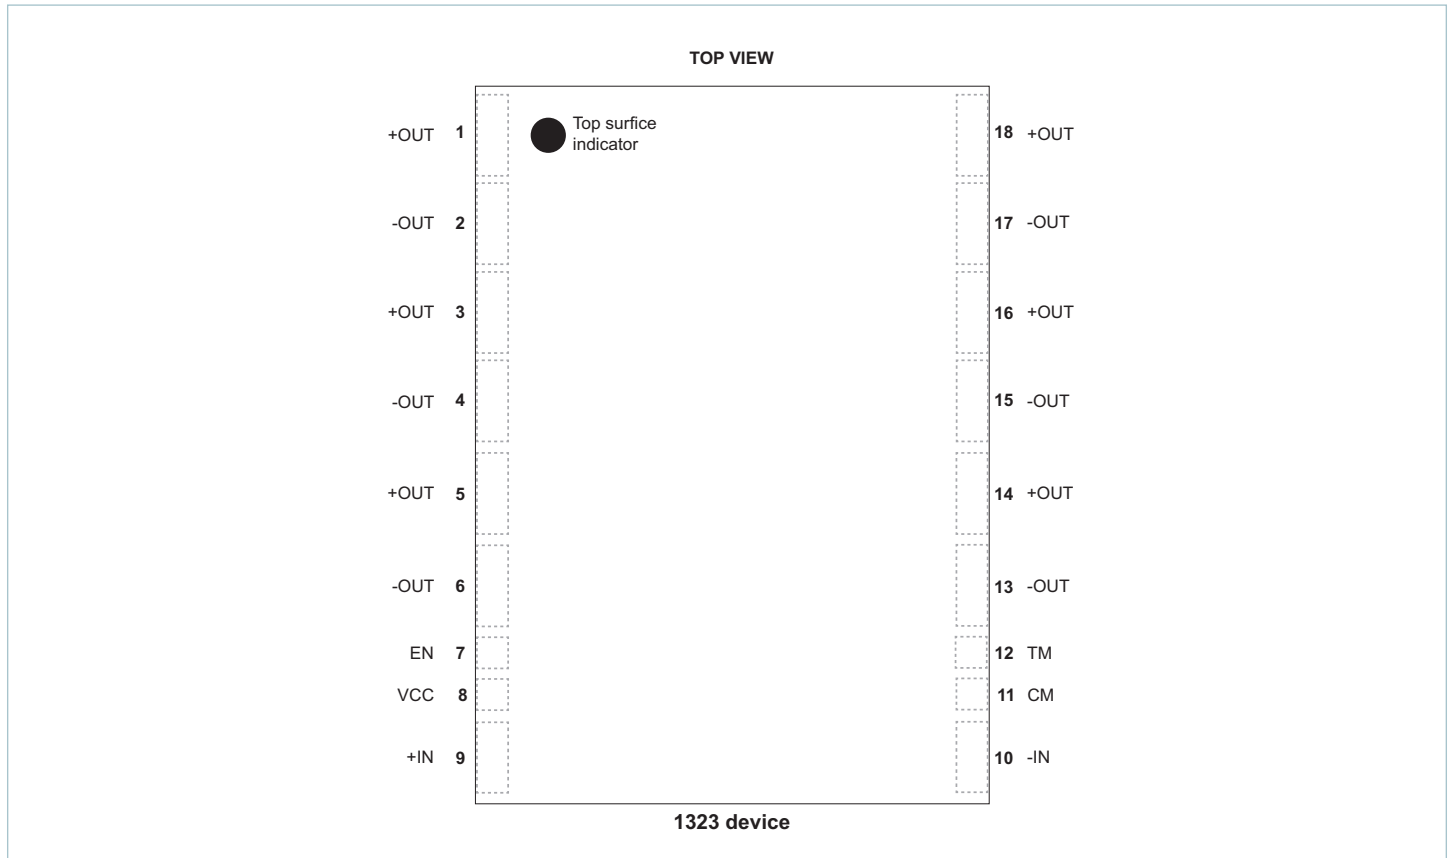

## Pin Numbering and Descriptions

Pin Number	Signal Name	Type	Function
1, 3, 5, 14, 16, 18	+OUT	OUTPUT POWER	Positive output terminal
2, 4, 6, 13, 15, 17	-OUT	OUTPUT POWER RETURN	Negative output terminal
7	EN	INPUT	To disable VTM in system
8	VCC	INPUT	Power train controller supply
9	+IN	INPUT POWER	Positive input terminal
10	-IN	INPUT POWER RETURN	Negative input terminal
11	CM	OUTPUT	Current monitor
12	TM	OUTPUT	Temperature monitor and Power Good Flag

**Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

Visit <http://www.vicorpower.com/dc-dc/non-isolated-regulated/data-center-prm-and-vtm> for the latest product information.

**Vicor's Standard Terms and Conditions and Product Warranty**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, and Product Warranty which are available on Vicor's webpage (<http://www.vicorpower.com/termsconditionswarranty>) or upon request.

**Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

**Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

The products described on this data sheet are protected by the following U.S. Patents Numbers:

5,945,130; 6,403,009; 6,710,257; 6,911,848; 6,930,893; 6,934,166; 6,940,013; 6,969,909; 7,038,917; 7,145,186; 7,166,898; 7,187,263; 7,202,646; 7,361,844; D496,906; D505,114; D506,438; D509,472; and for use under 6,975,098 and 6,984,965.

Contact Us: <http://www.vicorpower.com/contact-us>

**Vicor Corporation**  
25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715  
[www.vicorpower.com](http://www.vicorpower.com)

**email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

©2017 Vicor Corporation. All rights reserved. The Vicor name is a registered trademark of Vicor Corporation.  
All other trademarks, product names, logos and brands are property of their respective owners.