

### Power Factor Corrected, AC-DC Switchers

#### Family Features

- Near unity power factor
- EN61000-3-2 harmonic current compliance
- Low profile package
- Output power to 1,500 W
- Up to 6 user specifiable outputs
- Universal AC input
- Power density up to 11 W/in<sup>3</sup>
- Integral cooling fans
- Autosense
- Safety agency approvals: CE Marked, cTÜVus
- Vantage Line <sup>[a]</sup>
- RoHS compliant

#### Overview

The PFC MicroS, PFC Micro and PFC Mini are members of the low profile, high-density LoPAC series of power factor corrected AC-DC power supplies. Available as a one, two or three slot package, respectively, each LoPAC slot can be configured with standard Vicor DC-DC converter modules enabling up to six user specifiable isolated outputs in a package only 1.72" (43,6 mm) high with a power density of 11 W/in<sup>3</sup>.

For maximum versatility and flexibility, the LoPAC can be configured with VI-26x (full brick), VI-J6x (half brick) or Maxi, Mini, Micro V375 Series full, half and quarter brick modules. These modules cover the entire range of outputs from 1 to 100 Vdc and 25 to 600 Watts. The optimum solution can be factory configured based on your exact voltage and power requirements.

For conducted EMI, the LoPACs meet FCC Class A and B. Certain configurations meet EN55022 Class A and B (consult factory). Harmonic current limits per EN61000-3-2 and Surge Immunity per EN61000-4-5, in addition to a wide variety of safety agency approvals, further enhance the LoPAC flexibility.

<sup>[a]</sup> The Vantage Line is Vicor's affordable power supply option. Minor variances in some specifications between the Vantage Line and the Standard Line apply. Contact factory for more information.



**PFC Mini**  
12.20" x 6.00" x 1.72"  
309,9 x 152,4 x 43,6 mm  
Up to 1,500 W  
1 to 6 Outputs



**PFC Micro**  
10.40" x 5.06" x 1.86"  
264,1 x 128,5 x 47,3 mm  
Up to 800 W  
1 to 6 Outputs



**PFC MicroS**  
7.95" x 5.06" x 1.86"  
201,9 x 128,5 x 47,3 mm  
Up to 600 W  
1 to 3 Outputs

## DC Output Selections

The versatility of the LoPAC series is due, in large part, to the wide array of Vicor modules available to be configured into the different package formats. Slots can be populated with VI-200, VI-J00 or Maxi, Mini, Micro modules in full, half or quarter brick sizes. Vicor's full VI-26x, VI-J6x and V375 standard product matrices are available to choose from.

In addition, the full range of non-standard voltages and powers from 1 to 100 Vdc and 10 to 600 W is also available for inclusion. The table below is just a sampling of some of the most popular standard outputs that can be configured into LoPAC slots.

Output Voltage	Available Power (W) per Package Size						
	Maxi	VI-200		Mini	VI-J00		Micro
2Vdc	160	80	60	100	40	30	50
3.3Vdc	264	132	99	150	66	50	75
5Vdc	400	200	150	200	100	75	100
12Vdc	600	200	150	300	100	75	150
15Vdc	600	200	150	300	100	75	150
24Vdc	600	200	150	300	100	75	150
28Vdc	600	200	150	300	100	75	150
48Vdc	600	200	150	300	100	75	150

## LoPAC Slot Configurations

The DC-DC converter modules are used to populate each LoPAC converter slot. Each slot can be configured in different ways depending on module sizes and power limitations.

The following table summarizes the available slot configurations for each of the three LoPAC packages.

Model Type	# Slots	Maximum Output Power		Modules per Slot
		Total		
		@ 230 Vac	@ 115 Vac	
PFC Mini	3	1,500 W	800 W	1 Full or 2 Half
PFC Micro	2	800 W	500 W	1 Full or 2 Half or 3 Quarter
PFC MicroS	1	600 W	500 W	1 Full or 2 Half or 3 Quarter


## Autosense Feature\*

This feature is implemented in all converter slots in the LoPAC family. If remote sense connections are not needed or are inadvertently not made, no local sense connections are necessary. Simply connect the output(s) to the load and the

converter(s) will automatically operate in the local sense mode. If remote sense connections are made, the unit will operate in remote sense mode.

\*Applies to converter slots utilizing Maxi or Mini size converters.

## Part Numbering

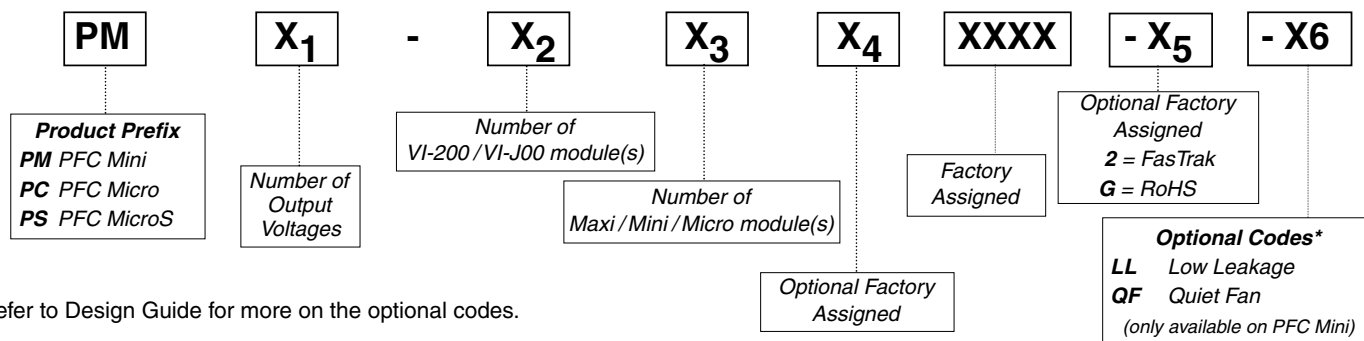

\* Refer to Design Guide for more on the optional codes.

## Performance Specifications

The following are typical performance specifications at room ambient temperature, nominal line voltage (115/230Vac) and 75% load on all outputs, unless specified otherwise. For detail

specifications, consult the Design Guide for the LoPAC configuration of interest. This is available on our website (vicorpower.com).

### INPUT CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
AC Input					
Voltage		85 – 264		Vac	
Frequency (Standard)		47 – 500		Hz	
Frequency (Vantage)		47 – 63		Hz	
DC Input	100 – 380		100 – 300	Vdc	
Line Regulation		0.4		%	From low line to high line
Inrush Current					
@ 115Vac	8.5		7	A pk	
@ 230Vac	17		14	A pk	
Ride Through Time		>20		ms	
@ load	1,200		500	W	
Conducted EMI/RFI	FCC Class A EN55022 Class A		FCC Class A EN55022 Class A ( <i>consult factory</i> )		Certain configurations meet FCC & EN Class B
Power Factor			>0.98		>75% load
Harmonic Current Limits			EN61000-3-2/A14		Class A
Transient Burst Immunity	EN61000-4-4		EN61000-4-4		Level 3, Performance Criteria B
Surge Immunity		EN61000-4-5			Installation Class 3, Performance Criteria B
Dielectric Withstand					
Primary to Chassis GND		2,121		Vdc	
Primary to Secondary		4,242		Vdc	
Secondary to Chassis GND		750		Vdc	

### OUTPUT CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Setpoint Accuracy (Standard)		1 % (Standard)	2% (Special)		% of Vnom
Setpoint Accuracy (Vantage)		2 % (Standard)	5% (Special)		
Load Regulation		0.05		%	10% to full load
		0.2		%	No load to full load
Temperature Regulation		0.005		%/°C	-20° to +65°C
Long Term Drift		0.02		%/khr	
Output Ripple & Noise					
≤10Vout		100		mV	20 MHz bandwidth
>10Vout		1.0		% Vout	20 MHz bandwidth
Voltage Trim Range					
VI-200/VI-J00 Slots		50 – 110		% Vout	±10% on 10 – 15 Vout
Maxi, Mini, Micro Slots		10 – 110		% Vout	Preload may be required
Remote Sense Compensation		0.5		Vdc	Autosense (See page 2)
OVP Set Point		125		% Vout	Not available on VI-J00 modules
Current Limit		115		% I <sub>max</sub>	Auto recovery

### ENVIRONMENTAL CHARACTERISTICS


Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Storage Temperature		-40 to +85		°C	
Operating Temperature					
Full Rated Power (Standard)		-20 to +45		°C	
50% Rated Power (Standard)		-20 to +65		°C	
Full Rated Power (Vantage)		0 to +45		°C	
50% Rated Power (Vantage)		0 to +65		°C	
Vibration	MIL-STD-810E, Category 10, Minimum integrity test (PFC Mini only)				
Safety Approvals	CE Marked, cTUVus				

### MECHANICAL CHARACTERISTICS

Parameter	PFC Mini	PFC Micro	PFC MicroS	Units	Notes
Weight	5.5	5.2	3.1	lbs	
	2.5	2.4	1.4	kg	
Overall Dimensions	12.20 x 6.00 x 1.72	10.40 x 5.06 x 1.86	7.95 x 5.06 x 1.86	in	L x W x H
	309,9 x 152,4 x 43,6	264,1 x 128,5 x 47,3	201,9 x 128,5 x 47,3	mm	

Mechanical Drawing, PFC Mini


PFC MINI

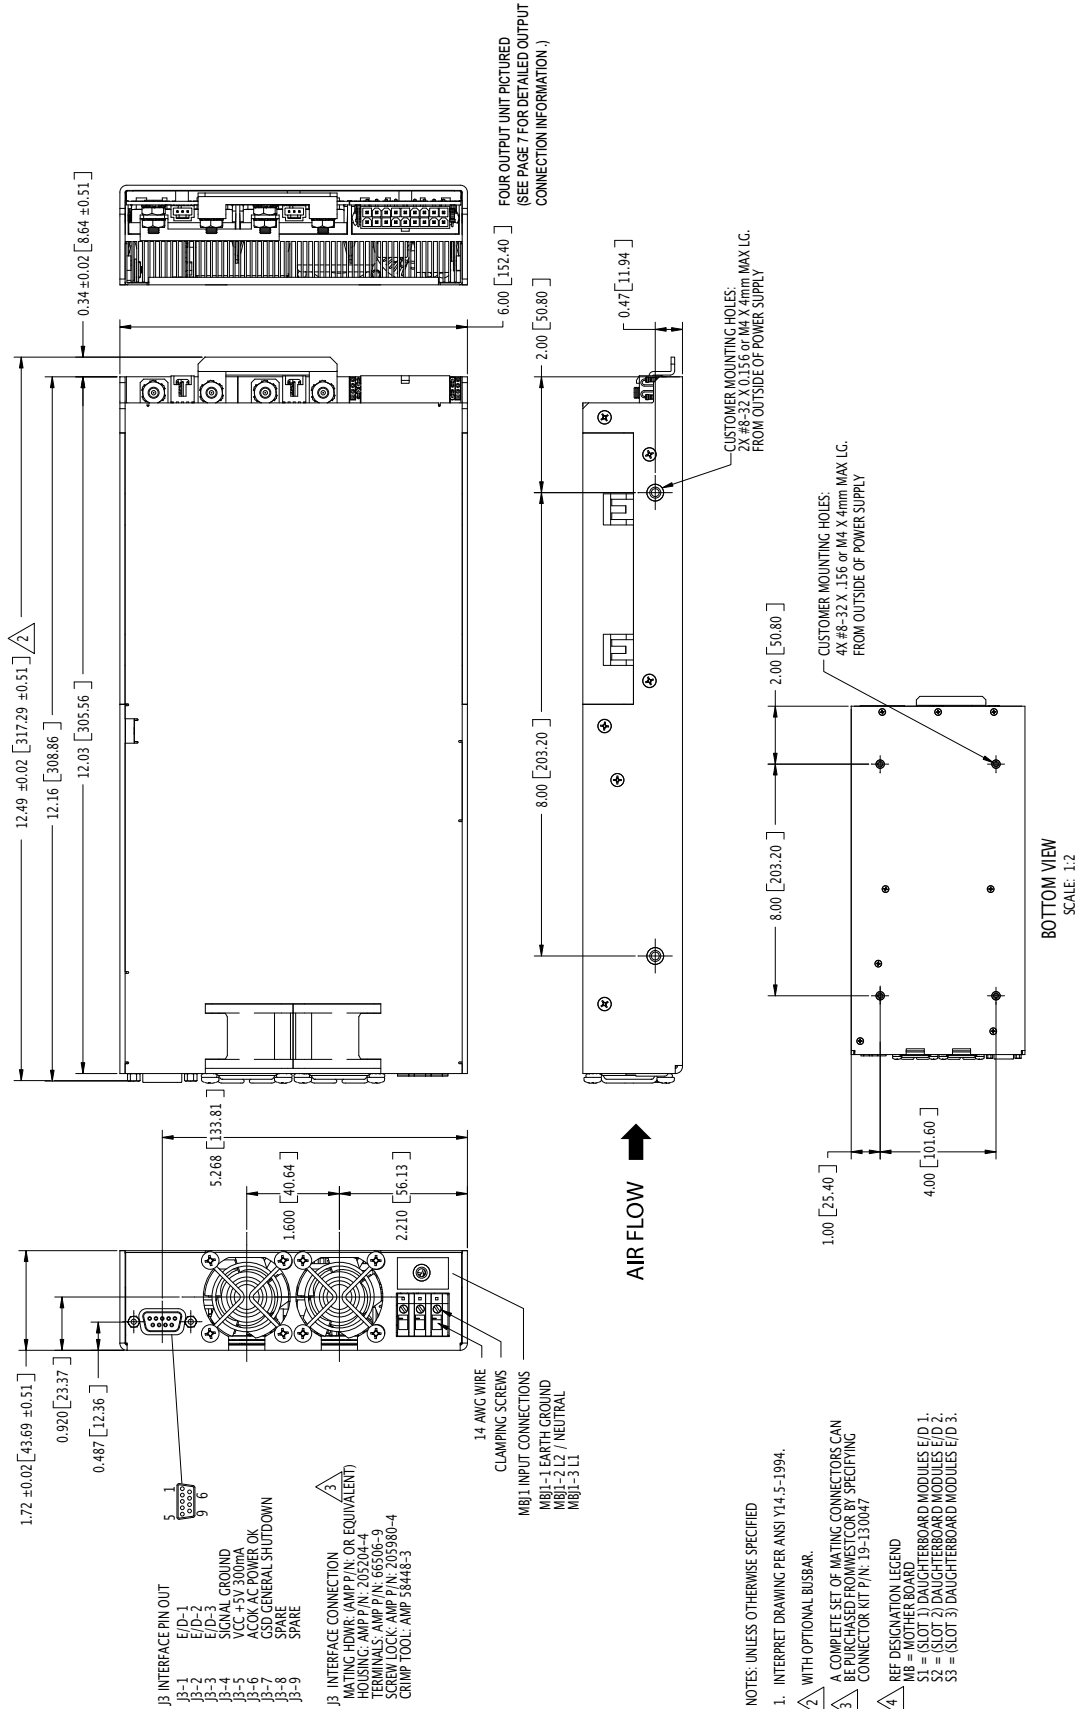

- NOTES: UNLESS OTHERWISE SPECIFIED
1. INTERPRET DRAWING PER ANSI Y14.5-1994.
  2. WITH OPTIONAL BUSBAR.
  3. A COMPLETE SET OF MATING CONNECTORS CAN BE PURCHASED FROM WESTCOR BY SPECIFYING CONNECTOR KIT P/N: 19-130047
  4. REF DESIGNATION LEGEND  
 M6 = (MOUNTING) MOUNTING BOARD MODULES E/D 1.  
 S2 = (SLOT 2) DAUGHTERBOARD MODULES E/D 2.  
 S3 = (SLOT 3) DAUGHTERBOARD MODULES E/D 3.

Mechanical Drawing, PFC Micro

PFC MICRO

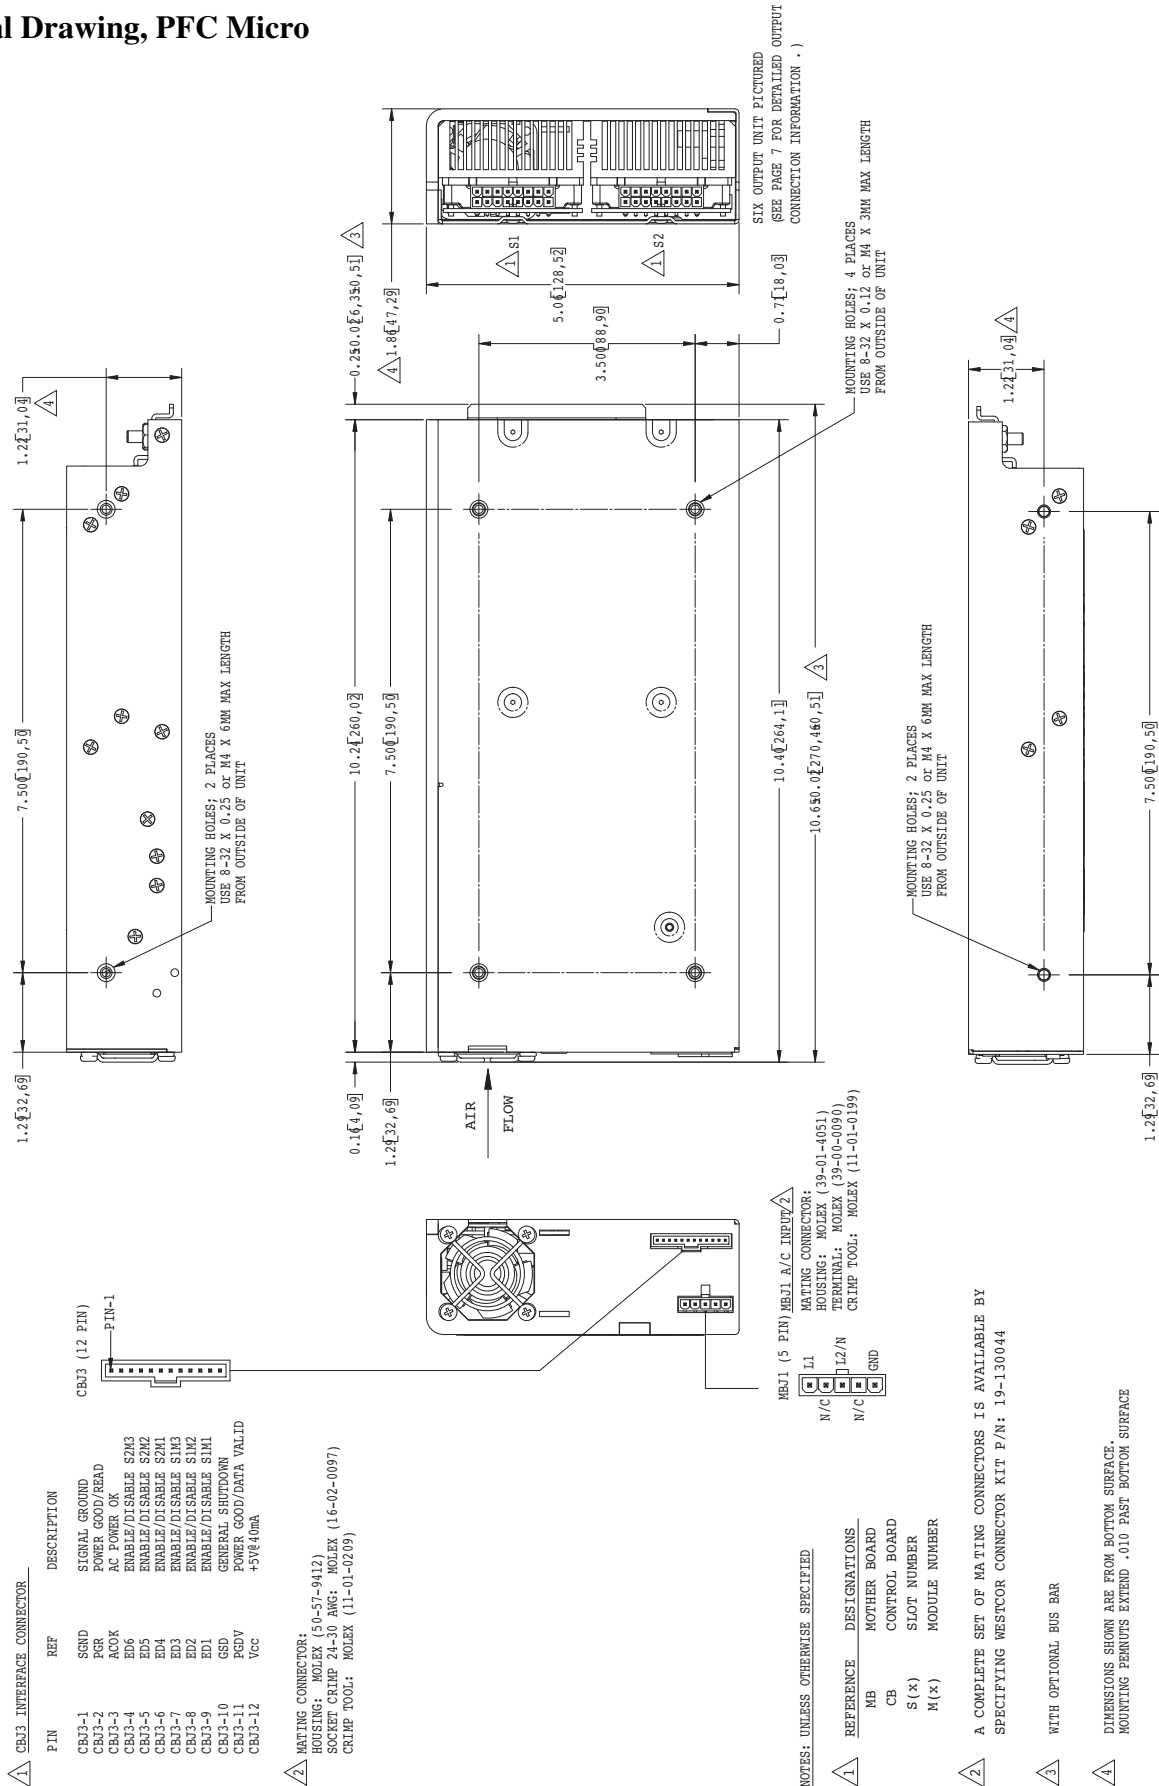

A CBJ3 INTERFACE CONNECTOR

PIN	REF	DESCRIPTION
CBJ3-1	SGND	SIGNAL GROUND
CBJ3-2	PGR	POWER GOOD/READ
CBJ3-3	ACOK	AC POWER OK
CBJ3-4	ED6	ENABLE/DISABLE S2M3
CBJ3-5	ED5	ENABLE/DISABLE S2M2
CBJ3-6	ED4	ENABLE/DISABLE S2M1
CBJ3-7	ED3	ENABLE/DISABLE S1M3
CBJ3-8	ED2	ENABLE/DISABLE S1M2
CBJ3-9	ED1	ENABLE/DISABLE S1M1
CBJ3-10	GSD	GENERAL SHUTDOWN
CBJ3-11	PgDv	POWER GOOD/DATA VALID
CBJ3-12	Vcc	+5V@40mA

B MATING CONNECTOR:  
 HOUSING: MOLEX (50-57-9412)  
 SOCKET CRIMP: 24-0 PNC MOLEX (16-02-0097)  
 CRIMP TOOL: MOLEX (11-01-0209)

C MBJ1 (5 PIN) MBL1 A/C INPUT 2  
 N/C L1  
 N/C L2/N  
 N/C L3  
 GND

NOTES: UNLESS OTHERWISE SPECIFIED

REFERENCE	DESIGNATIONS
MB	MOTHER BOARD
CB	CONTROL BOARD
S (x)	SLOT NUMBER
M (x)	MODULE NUMBER


A COMPLETE SET OF MATING CONNECTORS IS AVAILABLE BY SPECIFYING WESTCOR CONNECTOR KIT P/N: 19-130044

A WITH OPTIONAL BUS BAR

A DIMENSIONS SHOWN ARE FROM BOTTOM SURFACE. MOUNTING PEARNS EXTEND .010 PAST BOTTOM SURFACE

Mechanical Drawing, PFC MicroS


PFC MICROS

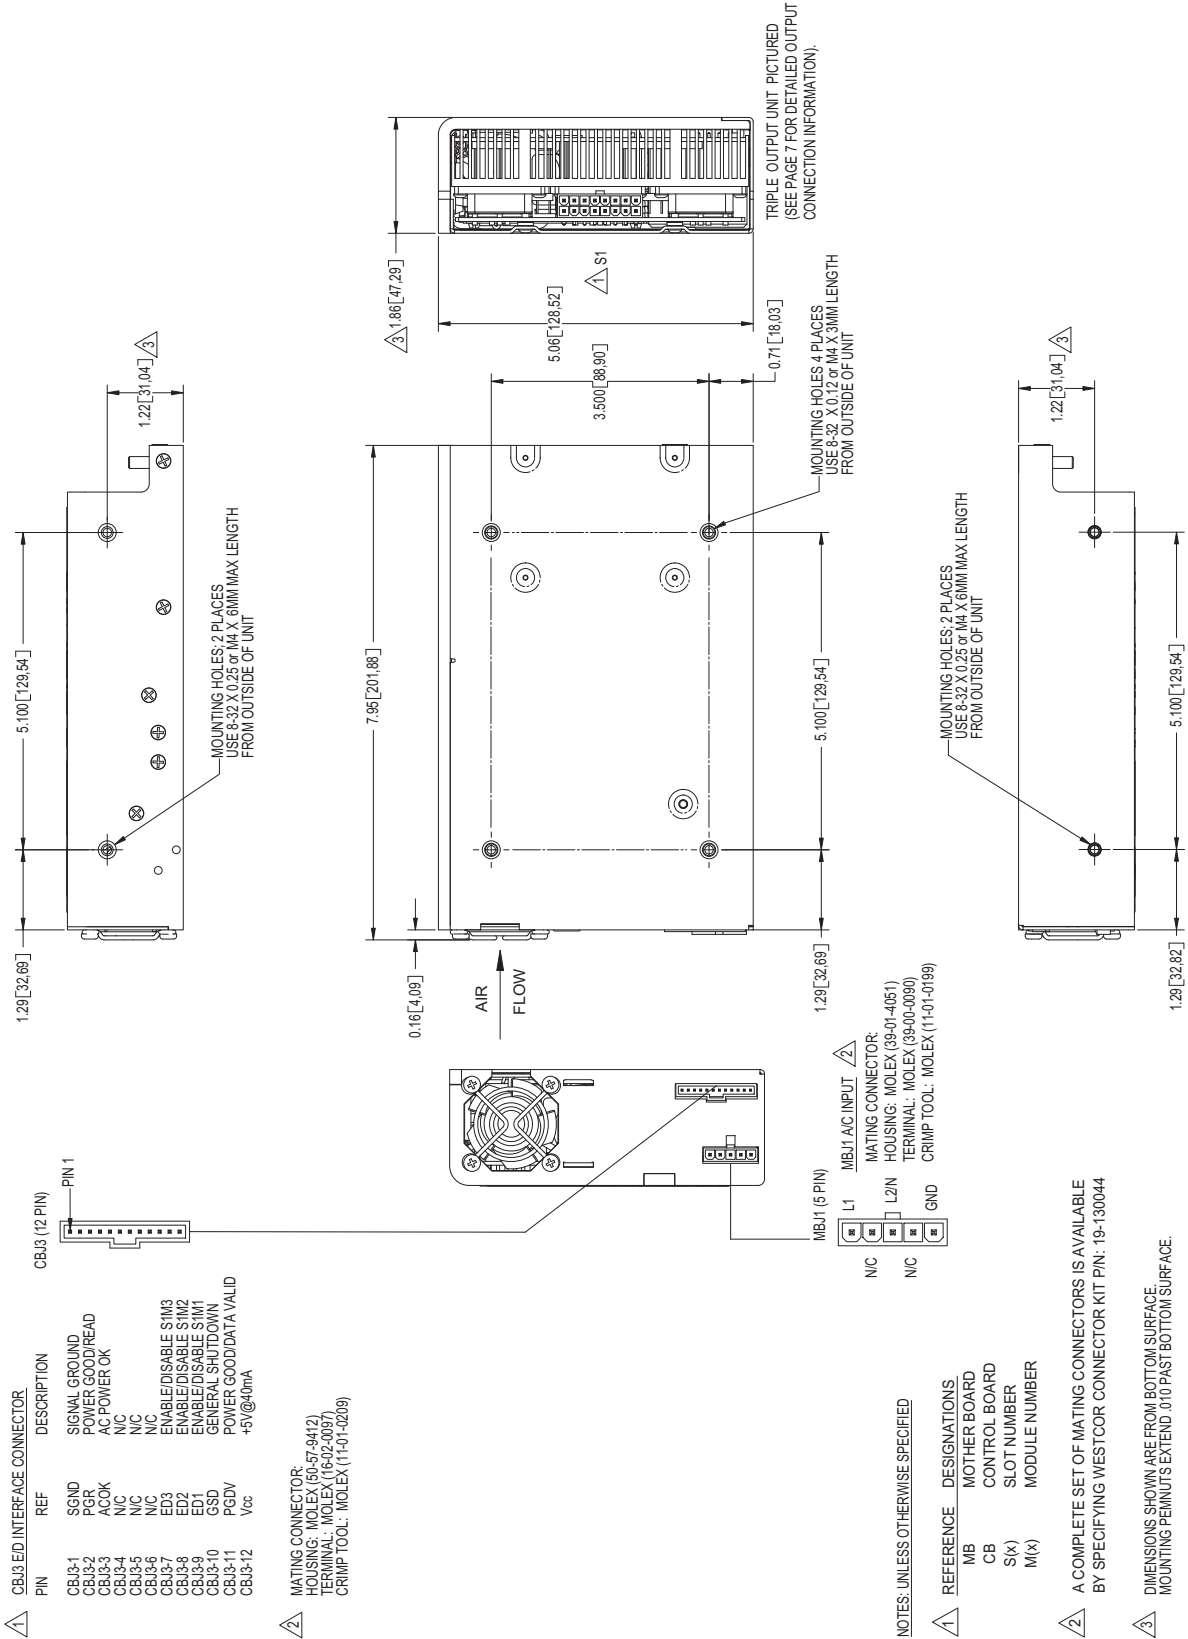

## Output Connections for the PFC Mini, PFC Micro and PFC MicroS

### A. OUTPUT STUDS - SINGLE OUTPUT

(when populated with Full Brick modules)  
PFC Mini, PFC Micro and PFC MicroS



SxJ2 REMOTE SENSE/TRIM  
PIN CONNECTOR

3	- REMOTE SENSE
2	+ REMOTE SENSE
1	TRIM

MATING CONNECTOR:  
HOUSING: MOLEX (50-57-9403)  
TERMINAL FEMALE CRIMP 22-24 AWG: MOLEX (16-02-0103)  
USE CRIMP TOOL: MOLEX (11-01-0208)

### B. MOLEX CONNECTOR - SINGLE OR DUAL OUTPUT

(when populated with Half Brick modules)

PFC MICRO 18 Pin Housing

SxJ1 (18 PIN OUTPUT, REMOTE SENSE  
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
9		10	+ V OUT M2
8	1 + V OUT M2	11	+ V OUT M2
7	2 - V OUT M2	12	- V OUT M2
6	3 - V OUT M2	13	+ SENSE M1
5	4 + SENSE M2	14	TRIM M2
4	5 - SENSE M2	15	- SENSE M1
3	6 TRIM M1	16	+ V OUT M1
2	7 + V OUT M1	17	- V OUT M1
1	8 + V OUT M1	18	- V OUT M1

PFC MINI 18 Pin Housing

SxJ1 (18 PIN OUTPUT, REMOTE SENSE  
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
9		10	+ V OUT M1
8	1 + V OUT M1	11	+ V OUT M1
7	2 - V OUT M1	12	- V OUT M1
6	3 - V OUT M1	13	+ SENSE M2
5	4 + SENSE M1	14	TRIM M1
4	5 - SENSE M1	15	- SENSE M2
3	6 TRIM M2	16	+ V OUT M2
2	7 + V OUT M2	17	- V OUT M2
1	8 + V OUT M2	18	- V OUT M2

\*PFC MicroS dual output slot configuration uses the  
type A stud connection for both outputs.  
3-pin connector designators are S1J1 and S1J2.

MATING CONNECTOR:  
18 PIN HOUSING: MOLEX (39-01-2180)  
TERMINAL FEMALE CRIMP 18-24 AWG: MOLEX 39-00-0039)  
USE CRIMP TOOL: MOLEX (11-01-0197)

### C. MOLEX CONNECTOR - SINGLE, DUAL OR TRIPLE OUTPUT

(when populated with Quarter Brick modules)

PFC Micro and PFC MicroS

SxJ1 (16 PIN OUTPUT, REMOTE SENSE  
AND TRIM PIN CONNECTOR)

PIN	DESCRIPTION	PIN	DESCRIPTION
8		9	+V OUT M3
7	1 +V OUT M3	10	-V OUT M3
6	2 -V OUT M3	11	N/C
5	3 TRIM M3	12	+V OUT M2
4	4 +V OUT M2	13	-V OUT M2
3	5 -V OUT M2	14	TRIM M1
2	6 TRIM M2	15	+V OUT M1
1	7 +V OUT M1	16	-V OUT M1

MATING CONNECTOR:  
16 PIN HOUSING: MOLEX (39-01-2160)  
TERMINAL FEMALE CRIMP 18-24 AWG: MOLEX (39-00-0039)  
USE CRIMP TOOL: MOLEX (11-01-0197)

The following accessories are available for the  
LoPAC units:

#### Connector Kits

A complete set of mating hardware for all  
combinations of input & output connections

PFC Mini 19-130047  
PFC Micro & PFC MicroS 19-130044

#### Current Share Boards

Used for current sharing between identical LoPAC Models  
for increased output power or redundancy

LoPACs with VI-200/VI-J00 Modules CSB01  
LoPACs with Maxi, Mini, Micro Modules CSB02

## **Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

### **Vicor's Standard Terms and Conditions**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

### **Product Warranty**

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

### **Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

### **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

**Vicor Corporation**  
25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715

#### **email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)