



FlexPAC



Versatile slide-in Module


Features

- Dimensions: 7.28 x 3.28 x 0.73" (184,9 x 83,3 x 18,3mm)
- 2, 3 or 4 isolated configurable Voltage Outputs
- Adjustable Voltage Range 2.0Vdc to 25Vdc
- 50W per output channel (limited by a maximum output current of 5A. For more information, refer to power delivery envelope chart on pg 3)
- Low noise 50mV over the entire voltage range
- Factory programmable channel power up sequencing
- Up to 4 isolated outputs
- MTBF: 489,000 Hours
- Outputs may be configured in series
- Voltage in range (Green LED)
- Over Voltage Protection (Red LED @ Channel)
- Shutdown (None Latching)
- Under Voltage warning (Red LED)
- Over Temperature Protection (Red LED & Channel Shutdown(None Latching))
- Compatible with all members of the MegaPAC family (including low leakage)
- Local sense available
- RoHS Compliant
- Weight - 0.5lbs


Product Description

ConverterPACs are the family of versatile slide-in module assemblies used in the MegaPAC Family of power supplies. Currently there are 13 ConverterPAC types available for use, including the FlexPAC. Most ConverterPACs of the same length are interchangeable within the MegaPAC series of power supplies. They can be added, moved, or changed as necessary.

Mechanical Drawings

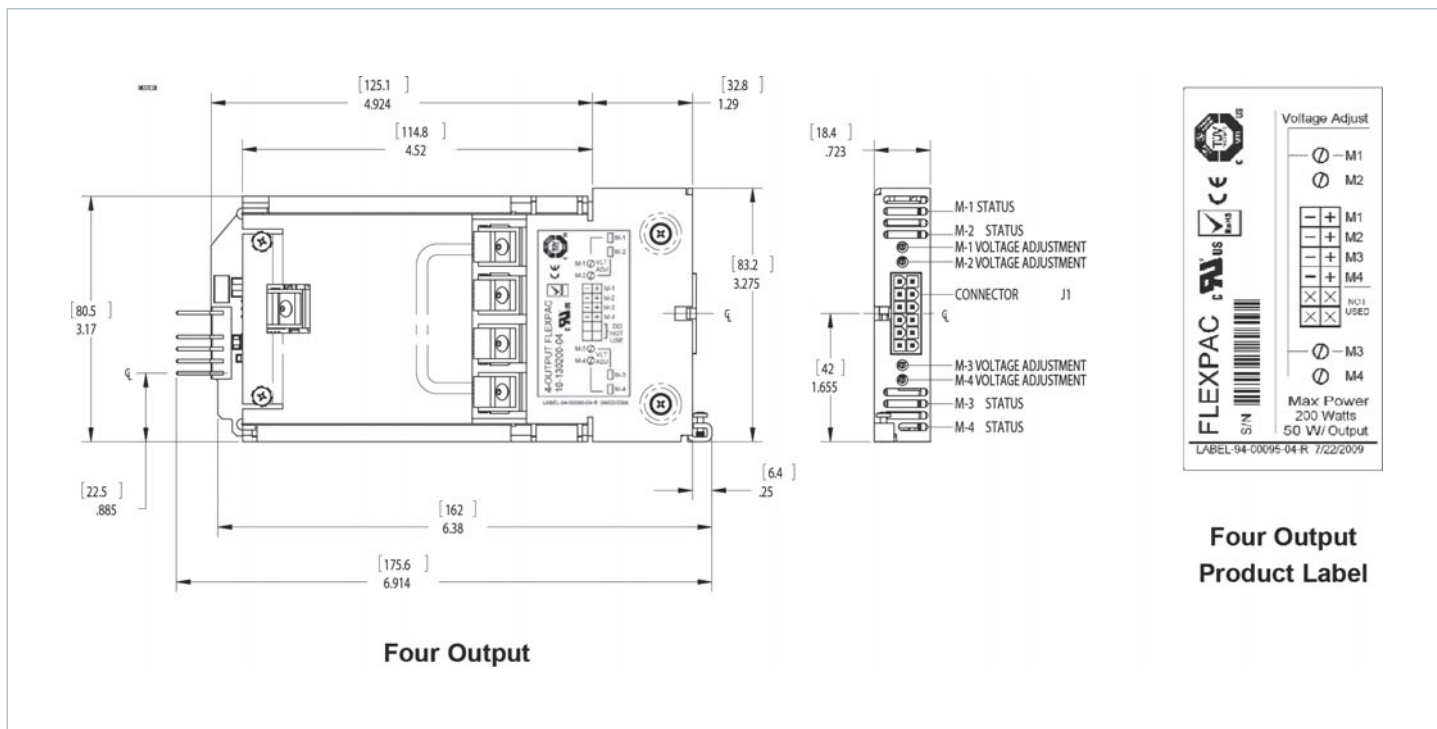

J1 Connector Pin Out

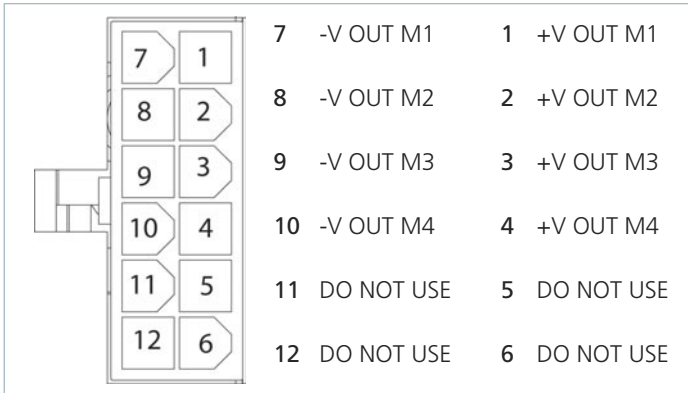

- For output M1, J1-1 is positive while J1-7 is negative
- For output M2, J1-2 is positive while J1-8 is negative
- For output M3, J1-3 is positive while J1-9 is negative
- For output M4, J1-4 is positive while J1-10 is negative
- For this 12 pin Molex connector, use Molex mating receptacle #39-01-2120 with #39-00-0039 terminals provided
- Attach terminals to 18-24 AWG stranded

How to Adjust:

- To increase the voltages turn the individual trimpot clockwise.
- To decrease the voltage turn the trimpot counter clockwise.

LED Status Indicator:


- Green LED denotes output voltage within range.
- Red LED denotes one of the following faults:
 - Over Voltage
 - Under voltage
 - Over temperature
- No LED visible when an output is depopulated

Enable/Disable:

The entire assembly will be enabled and disabled through the MegaPAC E/D and GSD function. Outputs cannot be individually enabled or disabled.

Start-up Sequencing:


Specific start-up sequences for an individual FlexPAC's outputs may be implemented in the FlexPAC hardware by special order. Please contact factory for details.

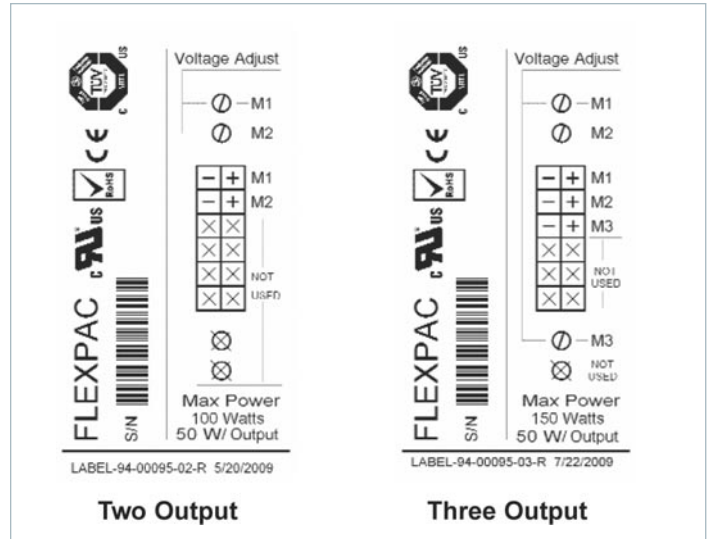


- 2 output FlexPACs have outputs M3 and M4 depopulated
- 3 output FlexPACs have output M4 depopulated
- If an output is depopulated there will be no output and the corresponding LED will be OFF

Voltage vs. Current Output Capabilities

The graph shows output voltage plotted against output current and wattage. From the graph the full 5A is available upto 10 Vdc. After this threshold has been reached, the available current decreases as output voltage increases to maintain a 50W maximum available power. Do not exceed on any output channel.

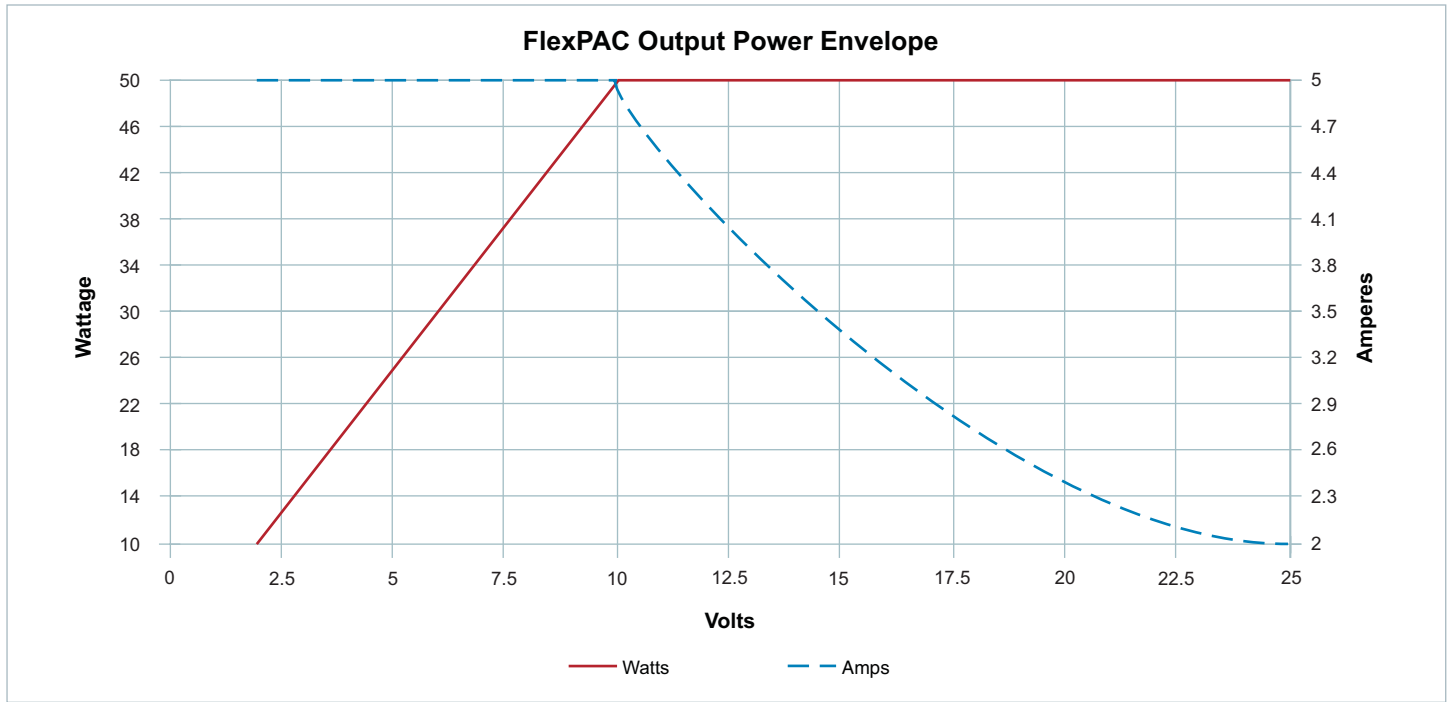

Part Numbering

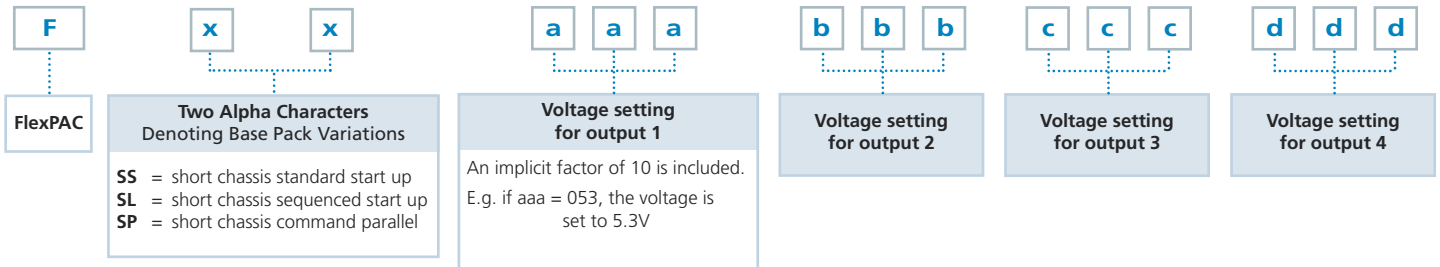

FSS103-205-033-000 is a short chassis standard start up FlexPAC with 3 outputs set at 10.3V, 20.5V, and 3.3.V Pg

FlexPAC Connector Kit (19-130065)

Output connector kits (optional) for use with the FlexPAC is available for Purchase from Westcor.

Item	QTY	Description	Vendor	Part No.
1	1	HOUSING 12 POS. 165 CTR W/ LATCH	MOLEX	39-01-2120
2	12	TERM FEM CRIMP 18-24 AWG TIN	MOLEX	39-00-0039
**		CRIMP TOOL FOR ITEM 2	MOLEX	11-01-0197

** Items for reference only (not included in kit)

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Specifications are subject to change without notice.

Vicor's Standard Terms and Conditions

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

Product Warranty

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Life Support Policy

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation
25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com
Technical Support: apps@vicorpower.com