



MicroPAC Conduction Cooled



AC-DC Power Supply

Features

- High efficiency up to 91%
- Small Size
- High power density (25W/In³)
- Up to 1300 W (Configuration dependent)
- Low power standby mode (Green mode)
- Universal Input (85 – 264 Vac) (47 – 63 Hz) (400Hz)
- DC Input (120 – 300 Vdc)
- Up to 4 isolated outputs
- Standard 12 V, 14 V, 24 V 28 V, 36 V & 48 V output
- 5 V @ 250 mA Isolated Aux Supply
- Output parallel capability
- Output series capability
- Output current sharing
- MicroPAC to MicroPAC Current sharing
- Power shed capability
- Vibration MIL-STD 810G-Figure 514.5C-17
- Over temperature warning
- Over temperature shut down
- Individual output
- Enable / disable
- All output enables / Disable capability
- TTL control signals (Isolated)
- Visual LED display panel
- External Serial interface and GUI (Part Number CI-01)
- Shock MIL-STD 810F
- Method 516.5 procedure 1

Product Description

The Conduction cooled MicroPAC power supply provides up to 4 isolated semi regulated output voltages of 12, 14, 24, 28, 36 and 48 Vdc and up to 1300 W of continuous power in a very small highly efficient package. The isolated outputs may be placed in parallel/series configurations and for applications requiring higher power levels MicroPAC power supplies can be configured in arrays up to several KW. Safety agency approvals limit the configured output voltages to 60Vdc. Configurations and applications where output voltages are greater than 60Vdc are non-SELV. This factory configurable rugged power supply supports a wide range of customer power requirements and is especially suited for distributed power architectures. The design offers a small flexible cost effective solution for applications requiring Power Factor Correction, high efficiency and power density even in environmentally challenging conditions.

Part Numbering

UP – **a** – **b** **b** **b** **b**

MicroPAC Constant

Number of outputs, 1 to 4

Output Configuration							
Fill in character from chart below for each output							
b	=	Vout	Watts	b	=	Vout	Watts
A		12	300	T		28	600
B		12	600	U		28	1200
C		12	900	G		48	325
D		12	1200	H		48	650
P		14	300	I		48	975
Q		14	600	J		48	1300
R		14	900	K		36	900
S		14	1200	M		[1]	[1]
E		24	600	Z		[2]	[2]
F		24	1200				

[1] M defines a slot with an air block filler, no BCM board
 [2] Z indicates the slot is populated with a BCM board that is connected in series or parallel with the previous slot

c – **d** – **e**

Cooling

C = Conduction Cooled

Conformal Coating Non-Safety Related

S = Standard Non-coated
M = Conformally Coated

RoHS Customer Option Non-Safety Related


G = RoHS
N = Non-RoHS
O = RoHS Eco array
L = Non-RoHS eco array

Examples:

UP1-FZZZ-CSG Denotes a single output of 24 V 1200 W standard TTL signaling and control, RoHS compliant


UP4-AAAA-CSN Denotes 4 output unit, each output is 12 V 300 W standard TTL signaling and control, non-RoHS

Mechanical

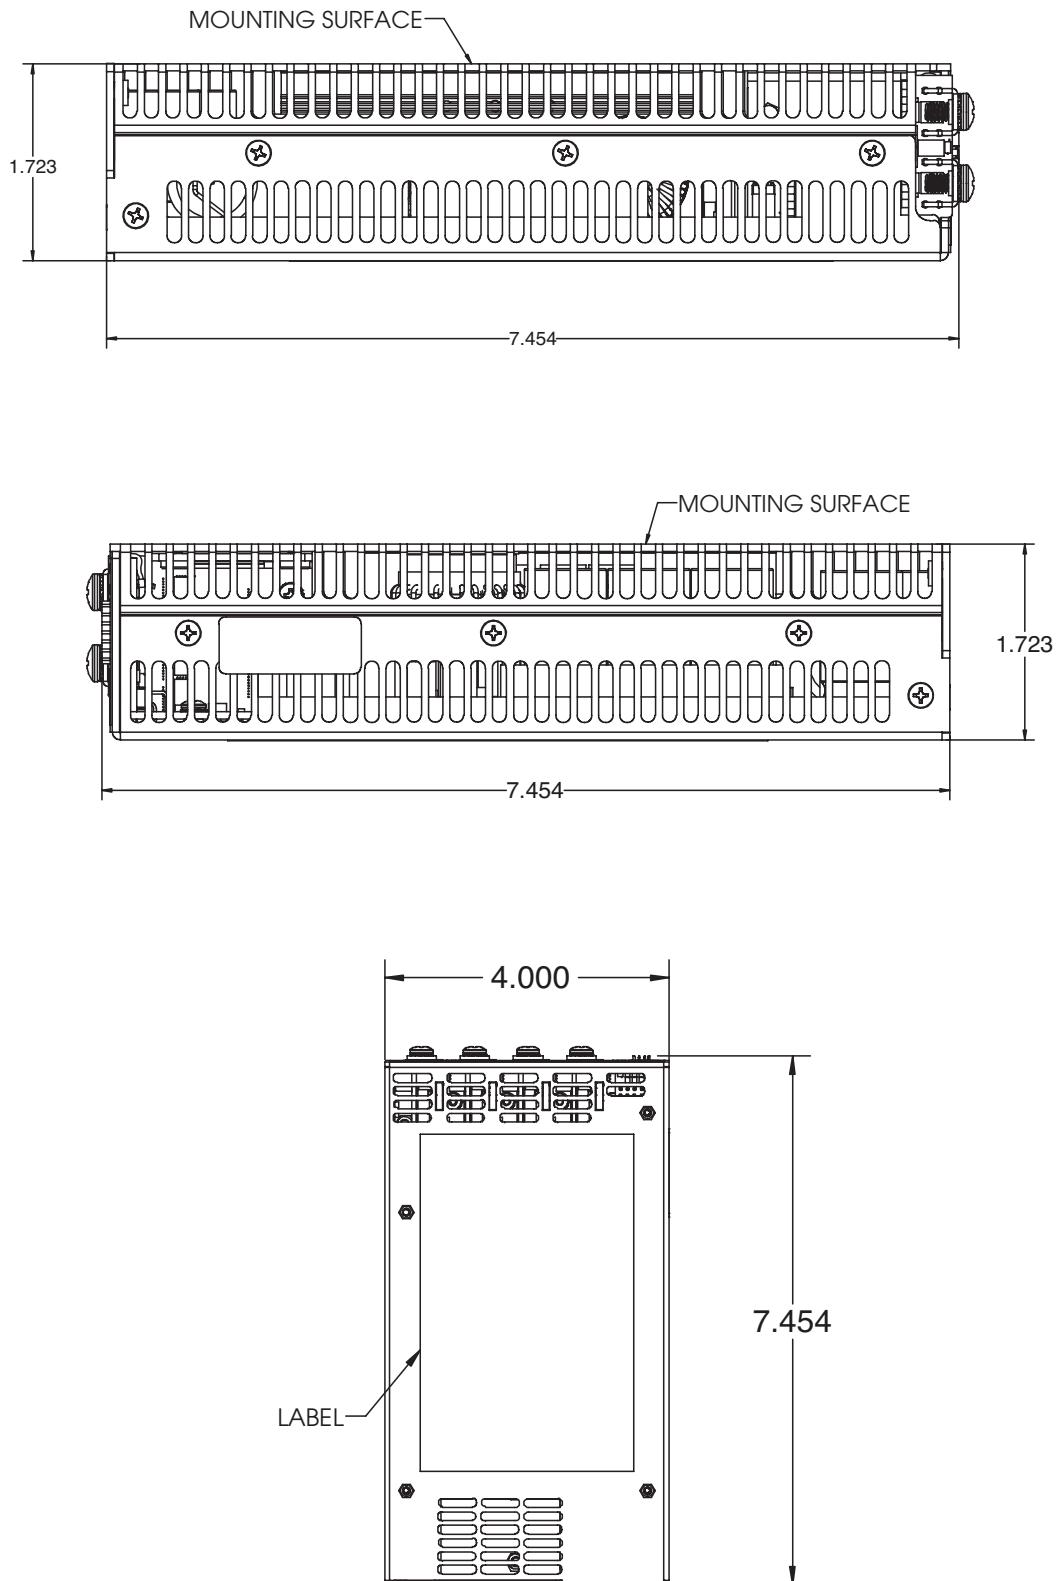


Power Out vs. AC Input Voltage vs. Base Plate (Lid) Temperature

The maximum output power plotted against AC input voltage and Base Plate (Lid) temperature must be maintained at or below the maximum limits. The graph below shows the rated power at different input voltages and base plate (Lid) temperatures.

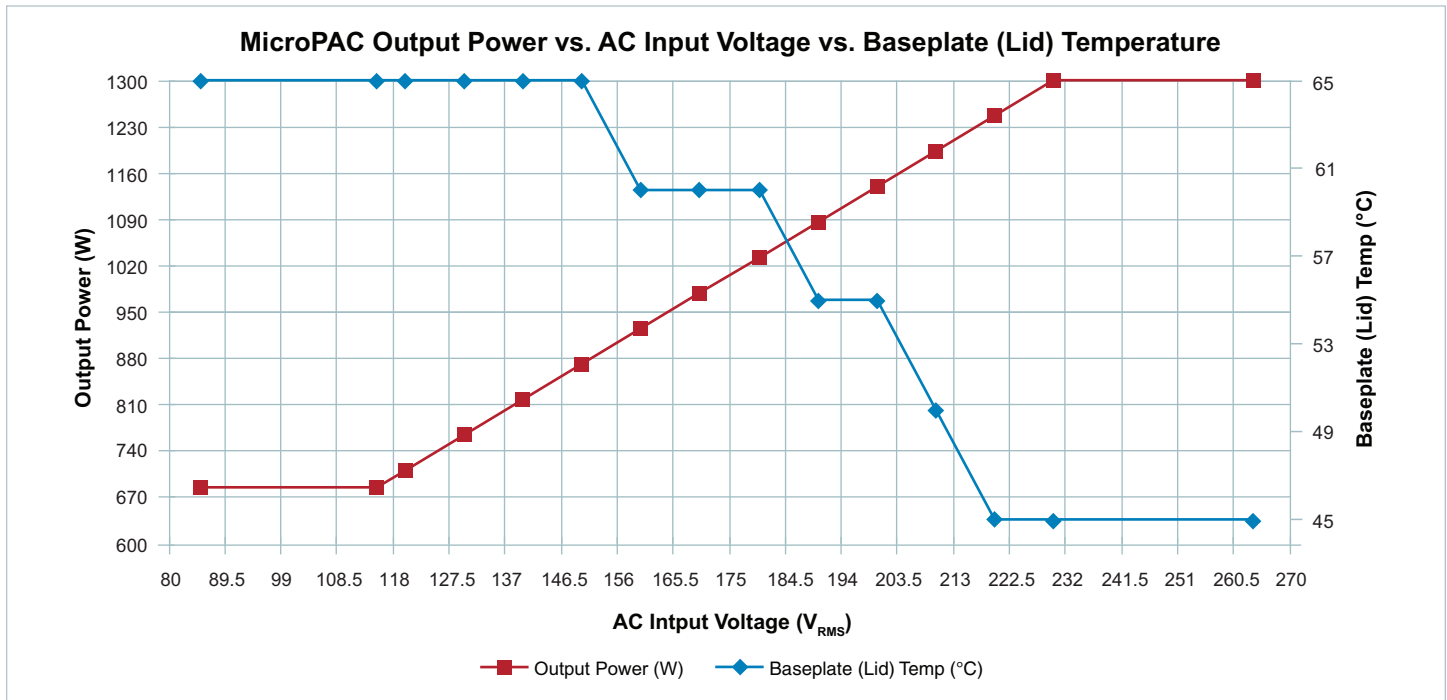


Power Out vs. DC Input Voltage vs. Base Plate (Lid) Temperature

The maximum output power plotted against DC input voltage and Base Plate (Lid) temperature must be maintained at or below the maximum limits. The graph below shows the rated power at different input voltages and base plate (Lid) temperatures.

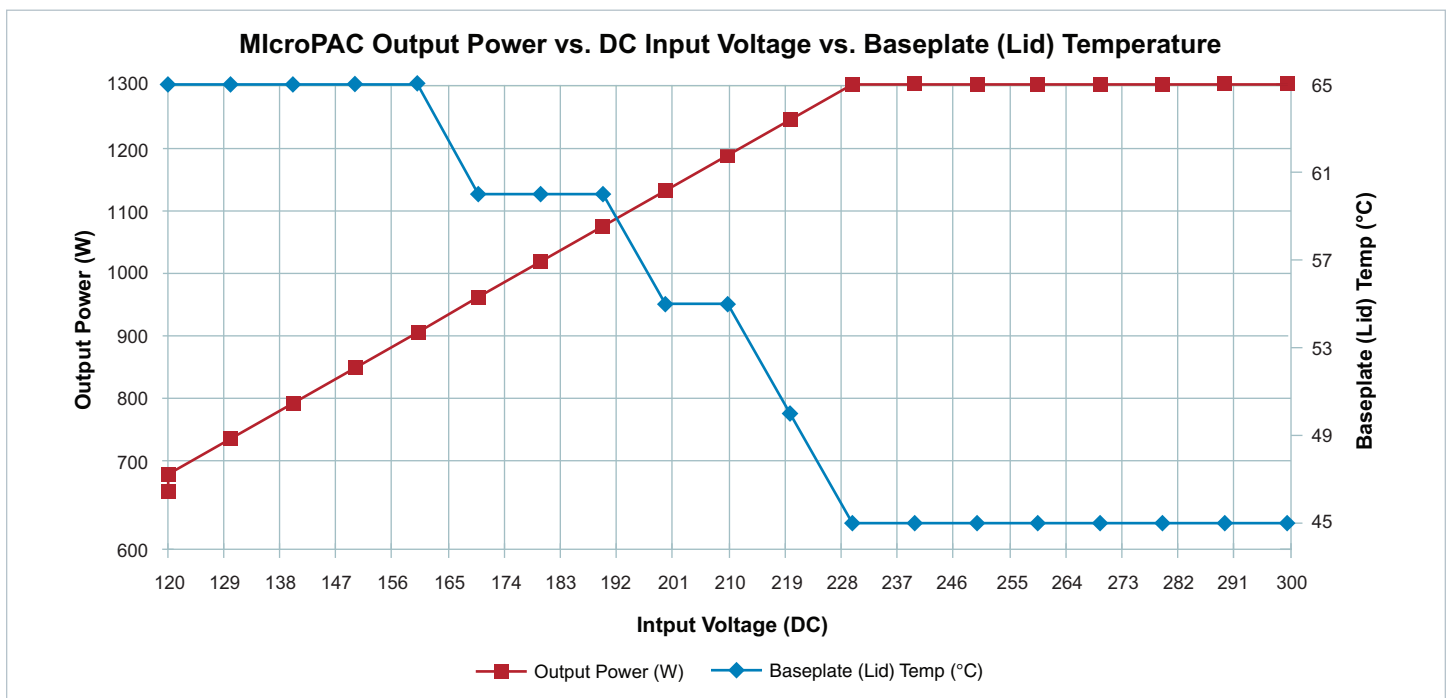

How to Use the Output Power vs. Input Voltage vs. Baseplate Temperature Graph

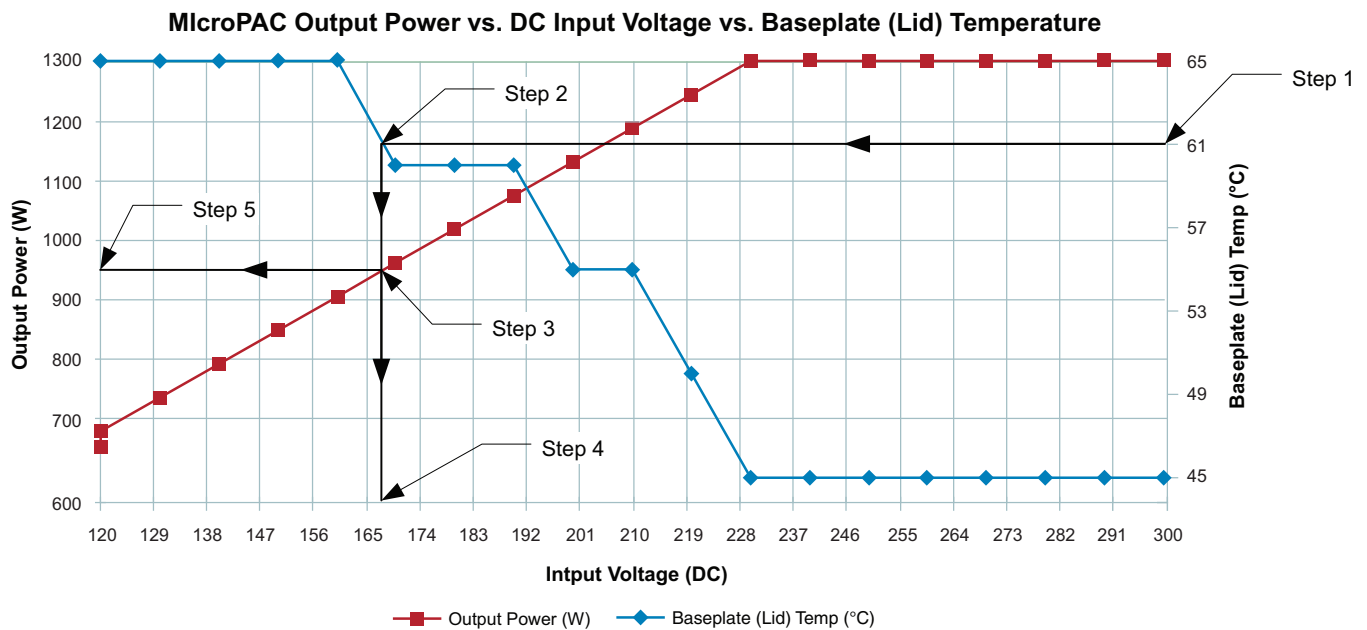

Step 1 Select a maximum baseplate temperature

Example: 61°C


Step 2 Draw a horizontal line to the left until it intersects with the “blue” Baseplate (Lid) Temp curve

Step 3 Draw a vertical line so that it intersects with the “red” Output Power curve


Step 4–5 The intersection point from Step 3 represents the maximum output power and the required input voltage based on the maximum baseplate temperature defined in Step 1

Example: 61°C, 950 W, 167 Vdc

MicroPAC Conduction Cooled Thermal Mounting Points

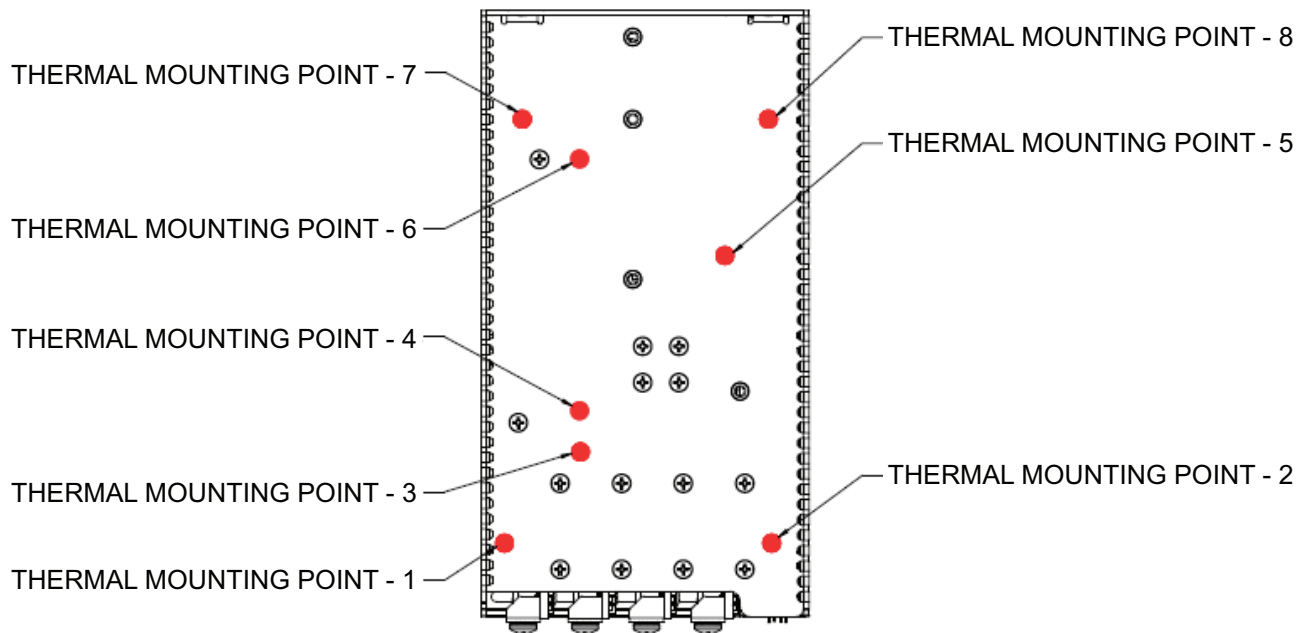


MicroPAC Conduction Cooled Mounting Example

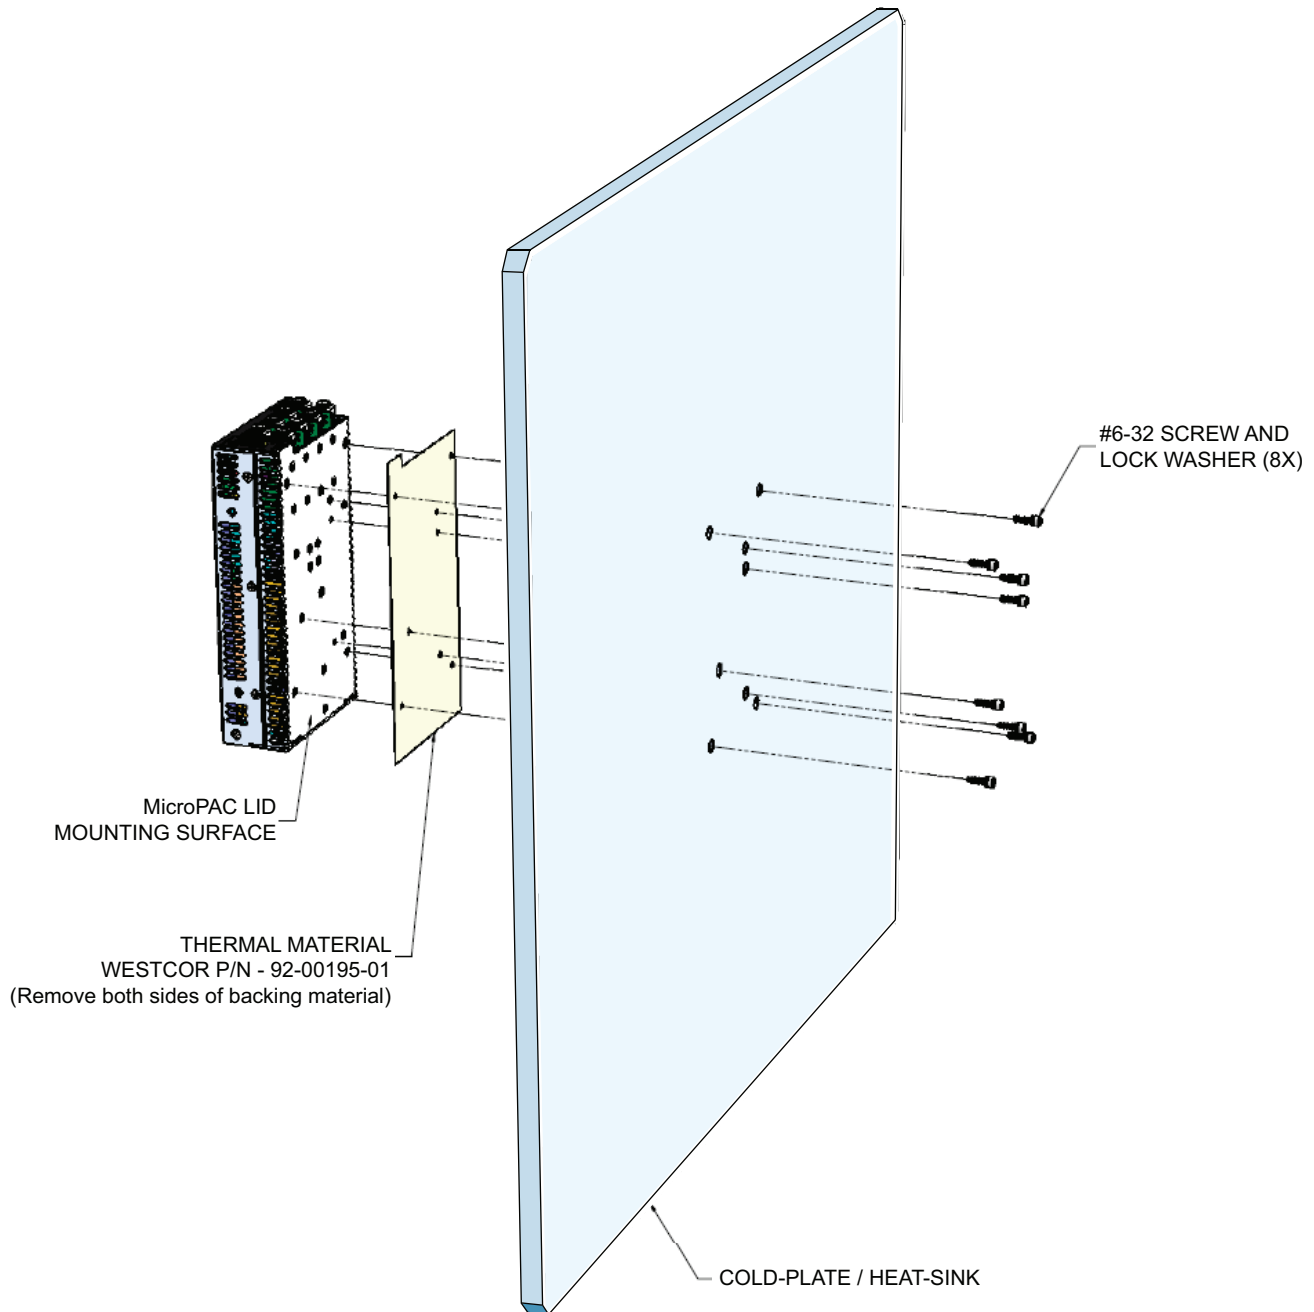

Selecting a MicroPAC Heat-sink

- P_{OUT} = MicroPAC Output Power
 η = MicroPAC Efficiency (%)
 T_b = MicroPAC Lid temperature (°C)
 T_a = Worse case ambient air temperature
 θ = Thermal Resistance degrees per watt (°C/W)
 P_d = Power Dissipation through coldplate or heat sink (Watts)
 θ_{sa} = Thermal resistance between the coldplate/heat sink and air
 θ_{sb} = Thermal resistance between the MicroPAC Lid and the coldplate/heat sink

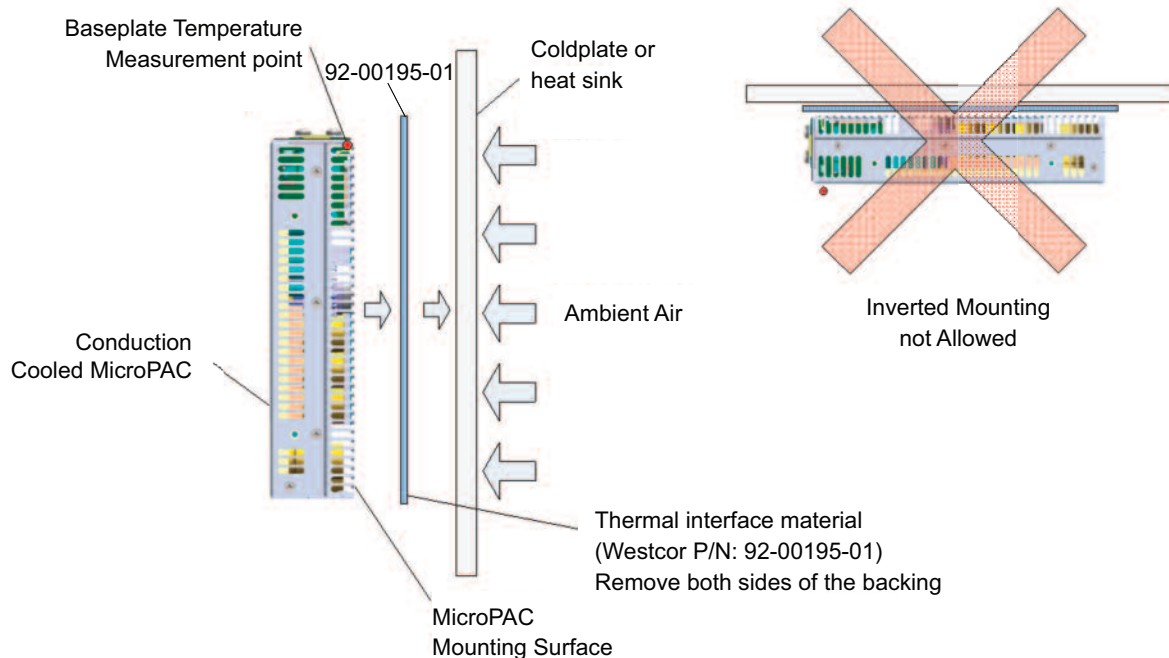

Examples:

$$P_{OUT} = 1000 \text{ W}$$

MicroPAC Output Power

$$\eta = 91\%$$

MicroPAC Efficiency

$$T_b = 40$$

MicroPAC Lid temperature

$$T_a = 25$$

Worse case ambient air temperature

$$P_d = \frac{P_{OUT}}{\eta} - P_{OUT} = 98.901 \text{ W}$$

Power Dissipation


$$\theta = \frac{T_b - T_a}{P_d} = 0.152 \frac{1}{\text{W}}$$

Thermal Resistance; degrees per watt (°C/W)

Customer Interface


Input Power Connector Pin Designation (AC Use Only)

Pin	Designation
1	Live (L1)
2	Neutral (L2)
3	Protective Earth (PE)

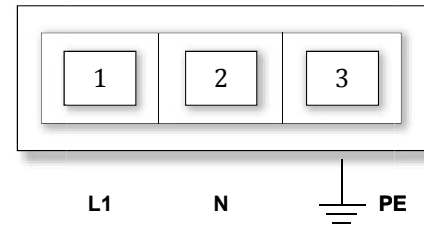


Input Power Connector Pin Designation (DC Use Only)

Pin	Designation
1	+ DC (L1)
2	- DC (L2)
3	Protective Earth (PE)

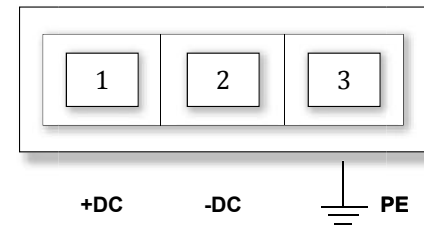

Customer Interface Pin Designation (J2) (For more information please see User Guide)

Pin	Function (All output signals are isolated)
1	+5V
2	0V (+5V Return)
3	ED 1
4	Over Temperature Warning / Over Temperature Shut Down
5	ED 3
6	AC-OK
7	Standby Mode
8	General Shut Down
9	N/C
10	ED 2
11	N/C
12	ED 4

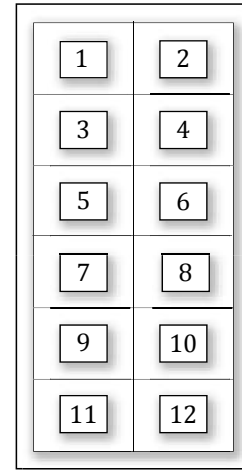

Customer Interface Connector Kit (19-130066)

Item	QTY	Description	Westcor	Vendor	# Vendor
1	1	CONN HOUSING 12 POS MINITEK	63-00168-12	FCI	90311-012LF
2	12	TERM FEM CRIMP 26-30 AWG	63-00167-01	FCI	77138-101LF
		CRIMP TOOL FOR ITEM 2		FCI	HT-151/RCY21151
3	1	CONN HOUSING 3 POS W/LATCH	63-00178-03	CVILUX	CP-01103A3S
4	3	TERM FEM CRIMP 16 AWG	63-00179-01	CVILUX	CP-01100106-HC
		CRIMP TOOL FOR ITEM 4		MOLEX	11-01-0199

Specifications

Input Specification			
Input Voltage	85 - 264 Vac		DC Rating: 120 VDC – 300 VDC
Fuse	("¼ 1-¼")Cooper Bussman, ABC-15, rated 15 amps Littelfuse, 505 series, rated 16A/500 VAC		(5 x 20mm) Littelfuse, 216 series, rated 16 amps ("¼ 1-¼") Littelfuse, 505 series, rated 16A/500 Vdc
Frequency	47Hz - 63Hz (400Hz)		
Inrush Current	30 A Peak		
Efficiency	≥91% @ Full load @ 25°C ambient 48 V output	≥90% @ Full load @ 25°C ambient 12 V output	
Power factor (115-230vrms)	.99/.96 typ. Meets EN61000-3-2		
Turn-on time	Ac on: 1.sec typ.1.5 sec maximum.		
Conducted EMI	EN55022 Class B Information technology equipment – Radio disturbances characteristics – Limits and methods of measurement BS EN55022:1998; CISPR 22:1997, incorporating corrigendum		
Harmonic distortion	Meets IEC 61000-3-2		
Isolation	Meets IEC 60950		
Leakage current	< 3.5mA @ 264Vac @ 63 Hz		
Hold up time	20 mS typical		
Warranty	2 Years		
Output Specification			
Number of outputs	1-to 4		
Normal output voltages	12 V, 14 V, 24 V, 28 V, 36 V and 48 V (contact factory for details)		
Maximum output current	100 A @ 12 V	85.71A @ 14V	[27 A @ 48 V]
Auxiliary output	5 V @ 0.5 A 5 0mV p-p		
Voltage regulation	12 V ± 3% typ	14 V ± 3% typ	48 V± 2% typ
Ripple and noise (20MHz bandwidth) (Full load)	12 V output (150 mV - 300 mV p-p) typ 14 V output (150 mV – 300 mV p-p) typ		48V output (600mV – 900mVp-p) typ
Current sharing accuracy	5 to 10%		
Short circuit protection	“Fold-Back” Technique		
Over voltage protection	12 V output set point 12.5 V typ		48 V output set point 50 V typ
Thermal protection	All outputs disabled when internal temperature exceeds safe operating range		
Minimum load	12 V up-to 1200 W		
Maximum load	48 V up-to 1300 W		
Maximum load	5.0 V Aux up-to 1.25 W		
Maximum load capacitance	1000µF per 12 V output		100µF per 48 V output
Environmental Specifications			
Storage Temperature	-40°C - +85°C		
Operating temperature	-40°C to (Please see Temperature and Input voltage de-rating guide)		
Functional shock	MIL-STD 810F Method 516.5 procedure 1, terminal peak saw-tooth wave, 40G 11 mS		
Vibration	Mil-STD 810G figure 514.5C-17 for Minimum Integrity Vibration		
Humidity	95% non condensing		
Cooling	Conduction Cooled (See design guide for details)		
Electromagnetic Compatibility			
	EN61000-6-1n European General EMC Immunity		
IEC 61000-4-11 [50Hz]	Voltage Dips 30% for 0.5 prd, pc C Voltage Interrupts (pc C)		
IEC 61000-4-4 [TRANSIENT]	EFT/Burst ± 1kV AC leads ± 500V DC leads. 5/50nsec 5kHz rep rate (pc B)		
IEC 61000-4-5 [SURGE]	Power line Surge AC in ± 2kV CM ± 1kV DM DC in ± 500V CM & DM 1.2/µSec (pc B)		
EN 61000-4-6 [0.15 to 80MHZ]	RF Common Mode Input leads, AC & DC leads, CDN 150 kHz to 80 MHz, 3V rms with 80% AM @1 kHz (pa A)		
EN 61000-4-2 [ELECTROSTATIC]	Electrostatic Discharge ± 4kV Contact ± 8kV Discharge (pc B)		
EN 61000-4-3	RF E-Field 80 MHz to 1 GHz 3 V/m with 80% AM @ 1 kHz (pc A)		
EN 61000-4-8	Power Freq H-Field 3A/M @ 50 Hz (pa A)		

Specifications cont.

Reliability	
FIT	3,449 FITS, 50% duty cycle at 25°C ambient; 45% RH $\pm$ 10%, 90% total output load; any specified input voltage; sea level operation.
Service life	5 Years
Safety & Regulatory	
UL / cUL (recognized)	UL 60950-1:2007 CAN C22.2 No. 60950-1-07
EN	EN 60950-1/A12:2011
IEC	60950-1-2005 2 Ed. +A1:2009

Please see User Guide for more information.

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Specifications are subject to change without notice.

Vicor's Standard Terms and Conditions

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

Product Warranty

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Life Support Policy

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation

25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com
Technical Support: apps@vicorpower.com